


PRODUCT DESCRIPTION

TrigasDM RF pickups are based on the modulated carrier principle for Near Zero Speed performance with no Magnetic Drag, resulting in extended flow range performance. RF sensors produce modulation of a carrier signal whose frequency is identical to the frequency of the excitation due to a passing target (turbine flowmeter rotor).

The movement of the rotor in the turbine is received by the pickoff. Every movement of the blade is an incoming pulse. This is forwarded as a frequency to the electronics. The electronic converts the measured physical quantity (rotor movement) into a linearized analog electrical and frequency signal for computing and/or further processing.

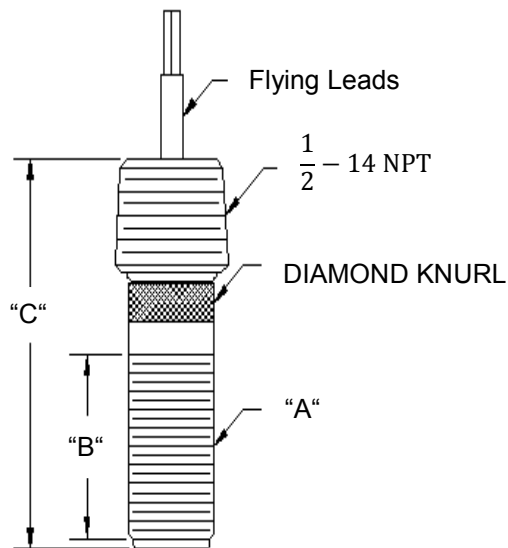

Mounting Thread (A) = 5/8x18
Thread Length (B) = 27mm
Overall Length (C) = 41,5mm

PRODUCT SPECIFICATIONS

DC-Coil Resistance: 10.5Ω +/- 10%

Inductance: 1 mH +/- 10%

Operating Freq.: ≥ 0.5 to ≤ 6000 Hz

Temperature Sensor: -

Temperature Range: -74°C to +204°C

Connectors: Flying Leads (appr.20cm)

Construction: 300 Series Stainless Steel Solid Epoxy Encapsulation

Sensor Face: Open front construction

CE-Compliance: EN55011, EN50022-2